


40014 - VC60 KABELLADDER 400 (L=6M)

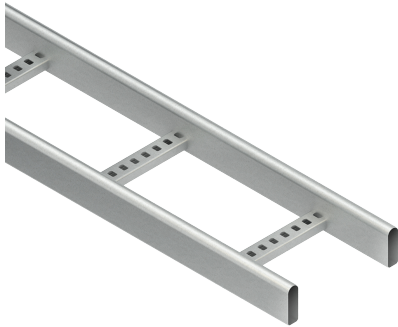

Product data

Product code:	40014
Brand:	Niedax Group
Series:	Around Cable tray
Type:	VOC
EAN Code:	04013339846931
Technical description:	VC60 KABELLADDER 400 (L=6M)
ETIM class:	EC000854 - Cable ladder

Technical data

Width:	400
Height:	60
RAL-number:	-
Surface protection:	Hot-dip galvanised
Weight:	3.42259
Type of rung:	Perforated profile
Side perforation:	No
Material quality:	Other
Length:	6000
Working temperature:	-20 - 120
Material:	Steel
Usable cross section:	13680
Working length:	6000
Type of side joist:	Tube shape (closed)
Suitable for circuit integrity:	No

Rung centre spacing:	250
Fixation rung:	Welded
Load test type according to IEC 61537:	Type II
Vertical cable ladder:	-
Possible support spacing:	- - 5
Safe working load according to IEC 61537 with support spacing 0.5 m:	-
Safe working load according to IEC 61537 with support spacing 1.0 m:	5000
Safe working load according to IEC 61537 with support spacing 1.5 m:	-
Safe working load according to IEC 61537 with support spacing 2.0 m:	2500
Safe working load according to IEC 61537 with support spacing 2.5 m:	-
Safe working load according to IEC 61537 with support spacing 3.0 m:	1000
Safe working load according to IEC 61537 with support spacing 4.0 m:	400
Safe working load according to IEC 61537 with support spacing 5.0 m:	200
Safe working load according to IEC 61537 with support spacing 6.0 m:	-
Safe working load according to IEC 61537 with support spacing 7.0 m:	-
Safe working load according to IEC 61537 with support spacing 8.0 m:	-
Safe working load according to IEC 61537 with support spacing 10.0 m:	-
Safe working load according to IEC 61537 with support spacing 9.0 m:	-
Safe working load according to IEC 61537 with support spacing 11.0 m:	-
Safe working load according to IEC 61537 with support spacing 12.0 m:	-